Grand Play

ref. 1005.4



ASSEMBLY INSTRUCTIONS

Assembly video on YouTube:
youtu.be/S3CabayKYPU

Product size: **8.24 × 5.19 × 2.19 m**
Four towers joined by 3 bridges, with 2 tic-tac-toe games, tunnel slide, 3 slides, 3 ramps and a swing set with 2 swing seats and a basketball hoop
Installation area: 8.3 × 5.2 m
Assembly by an adult — it can be done by one person.
21 steps · keep this manual for future reference.

BEFORE YOU START

Read carefully

Warning

This toy must only be given to the child after it has been **assembled by an adult**, and it must be used under **adult supervision**.

Assembly rules

- Mind the tube orientation: the **single hole goes at the bottom**, lined up with the hole in the leg frame, and the **top holes go up**.
- All bolts must be fitted with **washers**, for a more even and safe tightening.
- Check the position of each deck: the **side without the recess** goes on the window-wall side (swing tower and roofed towers) and on the tunnel side (tunnel tower).
- Walls always with the **rivet nuts facing outwards**, and always an **EVA spacer** between two walls.
- Bridges, ramps and slides are bolted to the deck **from below**.

Tools




- **10 mm wrench**, open-end or combination: M6×90 bolts (16 pcs, steps 6, 11, 12 and 13) and M6×45 bolts (94 pcs, steps 7, 12 and 14 to 20)
- **10 mm socket wrench with extension** (or 10 mm L wrench): recessed bolts of the tic-tac-toe crossbars (16 pcs, steps 7 and 12)
- **2 × 13 mm wrenches** (or wrench + 13 mm socket): M8×70 bolts with nut (8 sets, steps 11 and 12) and 5/16" × 2 1/4" bolts with nut (2 sets, step 20). One holds the nut and the other turns the bolt.
- Pliers


There are no specific tightening torques for the fasteners. The rivet nuts come pre-installed in the parts.

Bolts of this playground


Each type has its own color. The same card appears in each step.

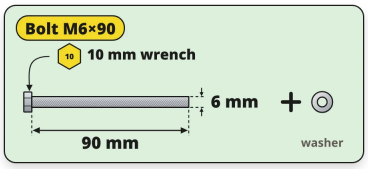


16× Bolt M6×90 · steps 6, 11, 12 and 13

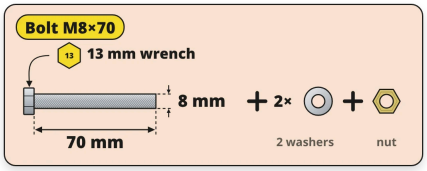

8× Bolt M8×70 · steps 11 and 12

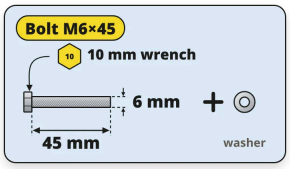


94× Bolt M6×45 · steps 7, 12 and 14 to 20

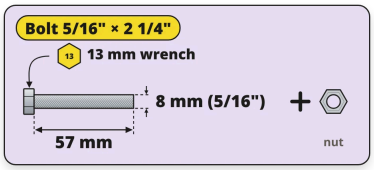

2× Bolt 5/16" × 2 1/4" · step 20

PARTS LIST

Grand Play parts



DECK 4×
Nº 1 · ref. 998711



RIVET NUT 8SJN-M6 212×
Nº 2 · ref. 2090183 · pre-installed



HEX BOLT M6 6×45 mm 94×
Nº 3 · ref. 2090194



M8 FLAT WASHER 44×
Nº 4 · ref. 2090185



BRIDGE 3×
Nº 5 · ref. 1000902



WASHER 82×
Nº 6 · ref. 2090347



WINDOW WALL 2×
Nº 7 · ref. 1000903

HEX BOLT M6 6×90 mm 16×
Nº 8 · ref. 2090460



SWING WINDOW WALL 1×
Nº 9 · ref. 1000930



CLIMBING RAMP 3×
Nº 10 · ref. 998704



TUNNEL SLIDE 1×
Nº 11 · ref. 998702



TUNNEL SLIDE BASE 2×
Nº 12 · ref. 998714



SMALL CROSSBAR 2×
Nº 13 · ref. 953203



ORANGE STRIPED WALL 4×
Nº 14 · ref. 998726



SLIDE 3×
Nº 15 · ref. 998703



LEG FRAME 8×
Nº 16 · ref. 998708



YELLOW WALL WITH CIRCLES 1×
Nº 17 · ref. 998730



SWING BEAM METAL LOCK 2×
Nº 18 · ref. 954312



HEX BOLT NC 5/16 × 2 1/4 2×
Nº 19 · ref. 2090392



5/16 NYLON LOCK NUT 2×
Nº 20 · ref. 2090370



SWING BEAM 2450 mm 1×
Nº 21 · ref. 1004301 · with 4 hooks




RED SWING-SET SUPPORT 1×
Nº 22 · ref. 975408



PLASTIC HOOP 1×
Nº 23 · ref. 988702 · with net

FRAME TUBE 8×
Nº 24 · ref. 998712




ROOF 2×
Nº 25 · ref. 998705

FRAME TUBE (NO ROOF) 8×
Nº 26 · ref. 1003202



EVA SPACER 16×
Nº 27 · ref. 998728




SWING SEAT 2×
Nº 28 · ref. 9355.B




TUBE CAP 8×
Nº 29 · ref. 1100137




M8 LOCK NUT 8×
Nº 30 · ref. 2090323



HEX BOLT M8×70 ZINC. 8×
Nº 31 · ref. 2090329




ORANGE WALL WITH CIRCLES 4×
Nº 32 · ref. 998706



YELLOW STRIPED WALL 4×
Nº 33 · ref. 998707



CROSSBAR (TIC-TAC-TOE) 8×
Nº 34 · ref. 998709




SMALL CUBE (TIC-TAC-TOE) 18×
Nº 35 · ref. 998710

Step by step

In each step, the arrows show where the part goes, the **black numbers** give the order and the **yellow letters** point to the details explained below the picture.

1 STEP 1 OF 21
Swing tower: legs, deck and 3 tubes

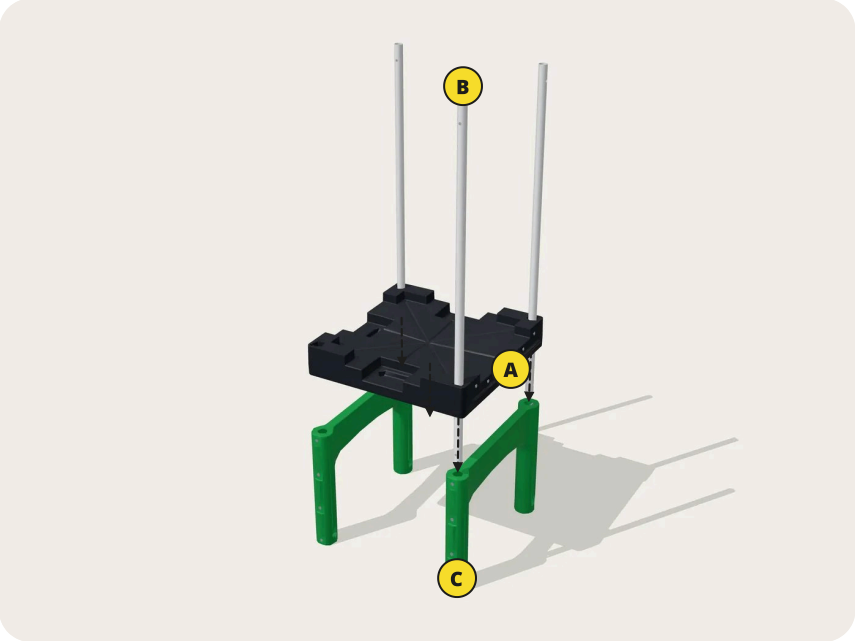

A Deck side without the recess: swing-set side

B Tube holes facing up

C Bottom hole of the tube lined up with the hole in the leg frame



Bottom hole of the tube lined up with the leg frame

A Tube hole lined up with the leg-frame hole

Start with the **swing tower**, one of the two towers without a roof. Place the 2 leg frames and put the deck on them.

Check the deck position: the **deck side without the recess goes on the swing-set side** (where the swing window wall goes).

Insert **3 tubes of 1550 mm** through the deck corners down to the bottom of the leg frames. The fourth corner stays without a tube for now.

WARNING
Tube orientation: the **single hole goes down**, lined up with the hole in the leg frame, and the **top holes stay at the top**.

The 8 shorter tubes (1550 mm) belong to the two towers without a roof. The 8 tubes of 2000 mm belong to the two roofed towers.

PARTS FOR THIS STEP




2× Leg frame
ref. 998708



1× Deck
ref. 998711


3× 1550 tube (tower without roof)
ref. 1003202

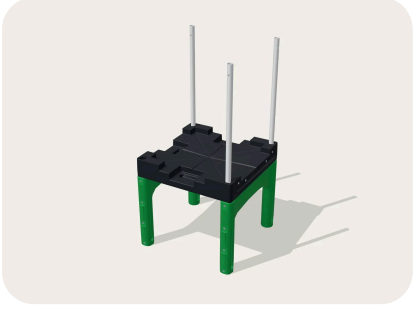

How it looks at the end of step 1

STEP 2 OF 21

2 Identify the walls

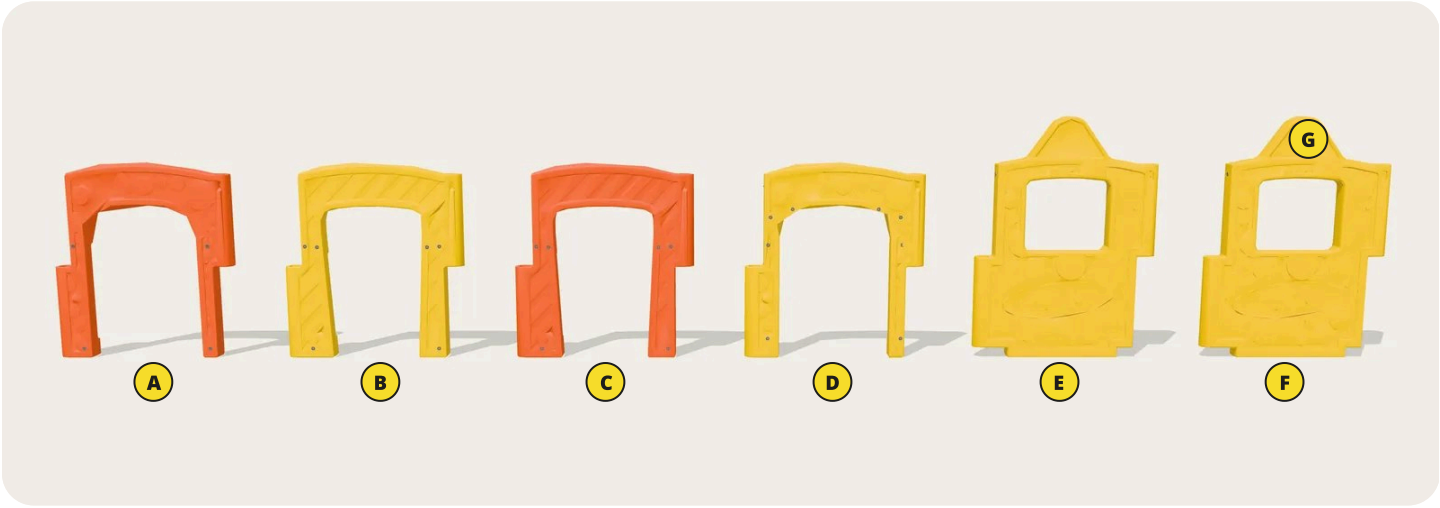

- **A** Orange wall with circles (4 pcs): one in each tower
- **B** Yellow striped wall (4 pcs): one in each tower
- **C** Orange striped wall (4 pcs): one in each tower
- **D** Yellow wall with circles (1 pc): tunnel tower, tunnel side
- **E** Window wall (2 pcs): roofed towers, tic-tac-toe side
- **F** Swing window wall (1 pc): swing tower
- **G** Only the swing wall has the hole and the 4 rivet nuts for the beam lock

The Grand Play has **16 walls**, 4 in each tower. Each tower takes an **orange wall with circles**, a **yellow striped** wall and an **orange striped** wall.


The fourth wall is different in each tower: the **swing window wall** on the swing tower, the **window wall** on the two roofed towers (tic-tac-toe side) and the **yellow wall with circles** on the tunnel tower (tunnel side).

Position on the swing tower: **orange wall with circles** on the bridge side, **yellow striped** and **orange striped** on the ramp sides and the **swing window wall** on the swing-set side.

WARNING
When fitting the walls, always keep the **rivet nuts facing outwards**: they are used to fix the bridges, ramps, slides and the tunnel.

STEP 3 OF 21

3 Swing tower walls

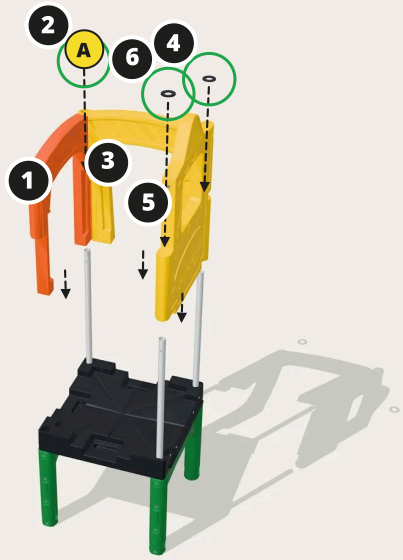

A EVA spacer on top, at the corner, before the next wall

Fit the walls by sliding them down the tubes, in the order of the numbers in the picture:

1. Orange wall with circles (bridge side). **2.** EVA spacer on top, at the corner.

3. Yellow striped wall (one ramp side). **4.** EVA spacer at the next corner.

5. Swing window wall (swing-set side). **6.** EVA spacer at the other corner.

WARNING
The EVA spacer goes **on top, before** the wall that closes that corner: there is always an EVA spacer between two walls.

PARTS FOR THIS STEP


- **1×** Orange wall with circles ref. 998706
- **1×** Yellow striped wall ref. 998707
- **3×** EVA spacer ref. 998728
- **1×** Swing window wall ref. 1000930



How it looks at the end of step 3

STEP 4 OF 21

4 Last wall of the swing tower

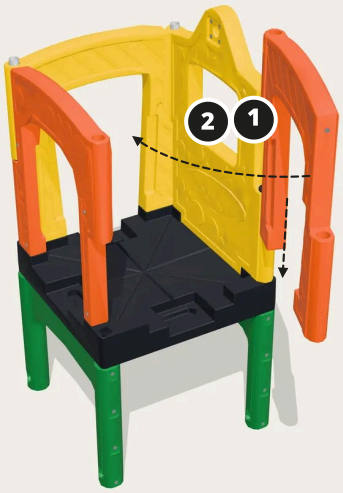

1. Fit the end of the **orange striped wall** (other ramp side) on the **corner tube already in place** and lower the wall straight down, **swung open outwards**.

2. With the wall resting on the deck, **swing it around the tube** until the square is closed.

> The other corner of this wall still has no tube: it goes in at step 5 and locks the walls.

PARTS FOR THIS STEP




1× Orange striped wall
ref. 998726



How it looks at the end of step 4

STEP 5 OF 21

5 Last EVA spacer, 4th tube and caps

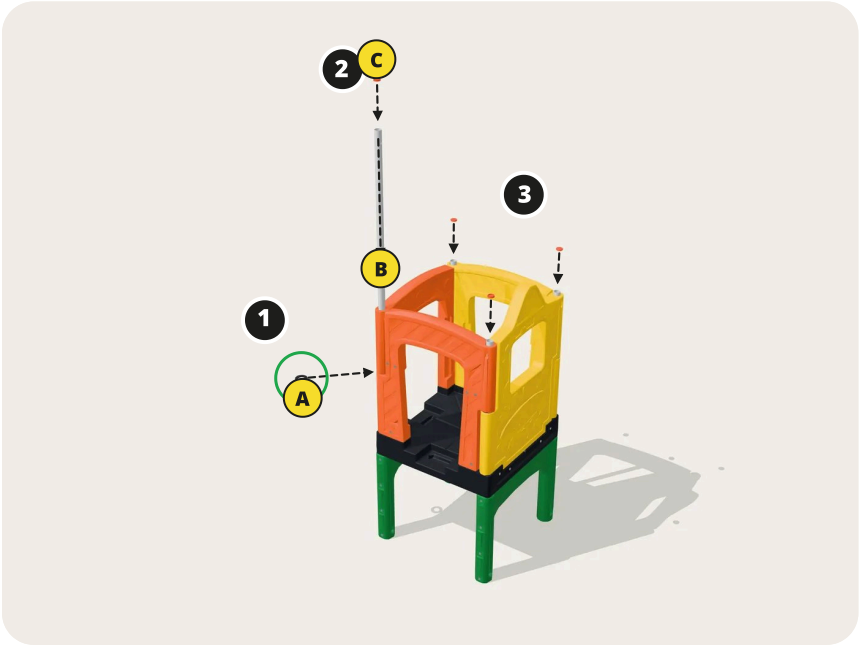

A Last EVA spacer: goes in from the front, horizontally

B Lower the 4th tube: it locks the walls

C Caps fitted on top of the 4 tubes

1. Fit the last EVA spacer **from the front**, horizontally, at the corner that has no tube yet.

2. Lower the **4th tube** (single hole down): it goes through the walls and the EVA spacer and locks the set.

3. Fit the **4 caps** on top of the tubes.

WARNING
Mind the **finishing caps**: they must be fitted on top of the 4 tubes of both towers without a roof.

PARTS FOR THIS STEP



1× EVA spacer
ref. 998728

1× 1550 tube (tower without roof)
ref. 1003202



4× Tube cap
ref. 1100137




How it looks at the end of step 5

STEP 6 OF 21

6 Join the swing tower walls



A 4 M6×90 bolts go through the tubes (1 at each corner)

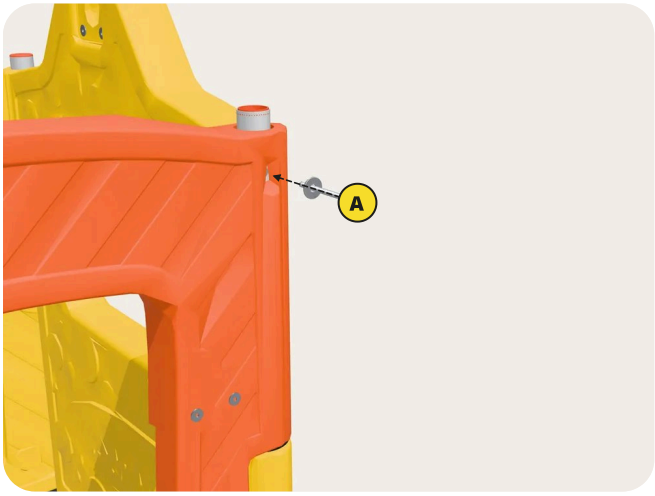

M6×90 bolt going through the tube

A M6×90 bolt + washer

Join the walls with the longer bolts: **4 M6×90 bolts with washer**, 1 at each corner, fitted **from the outside in**.


The tubes have through holes for the bolts.

PARTS FOR THIS STEP

4× Washer
one on each bolt

4× Hex bolt M6×90
ref. 2090460

BOLT AND TOOL

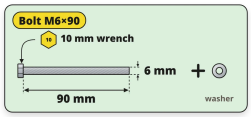


Tool: **10 mm wrench.**




How it looks at the end of step 6

STEP 7 OF 21

7 First roofed tower: legs and tic-tac-toe

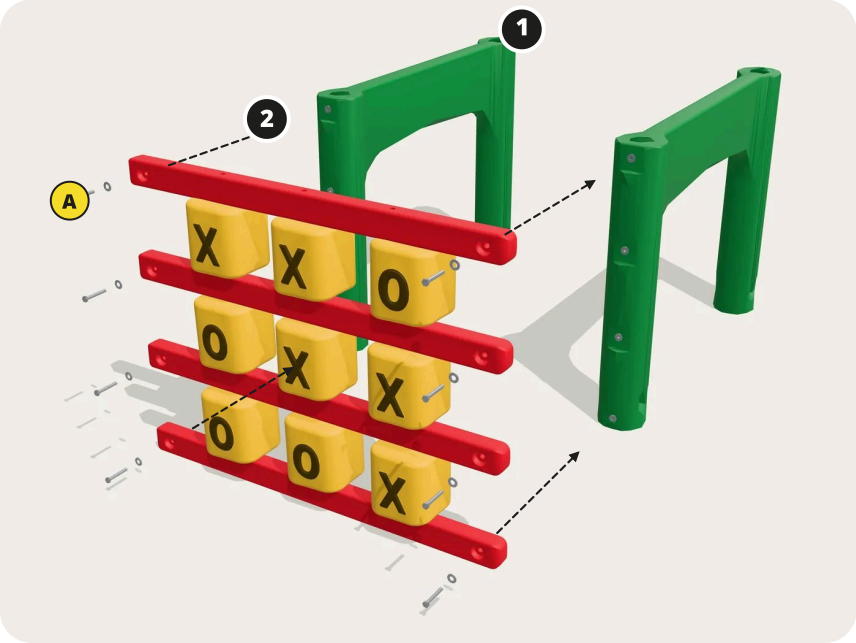

A M6×45 bolt + M8 flat washer, recessed at the end of the crossbar

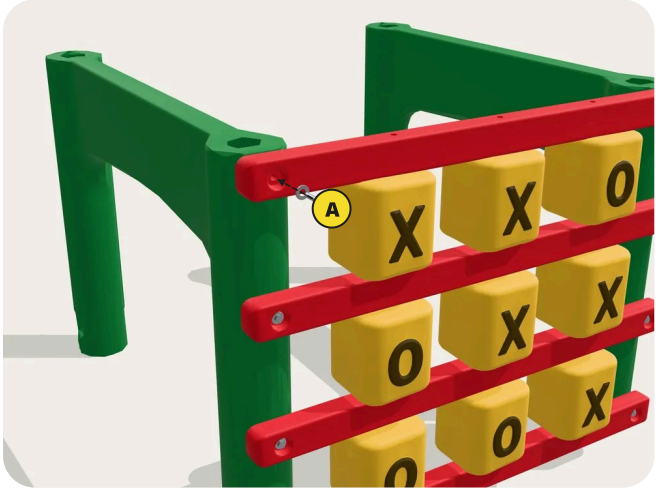

Crossbar bolt, recessed

A M6×45 bolt + M8 flat washer into the rivet nut of the leg frame

Now build the **first roofed tower**. Place the 2 leg frames with their **open ends towards the tic-tac-toe side** (where the window wall goes).

1. Build the **tic-tac-toe** between the ends of the leg frames, from the bottom up: fix the bottom crossbar, fit **3 cubes** on it and fix the next crossbar on top, holding the cubes. Repeat up to the 4th crossbar: **3 rows of 3 cubes**.

2. Each crossbar takes **2 M6×45 bolts with M8 flat washer**, one on each leg frame (8 on the tic-tac-toe).


WARNING
The crossbar bolts sit in a **recess**: use a 10 mm socket wrench with extension (or a 10 mm L wrench).

Before the final tightening, check that the cubes **turn freely**.


PARTS FOR THIS STEP

- **2×** Leg frame ref. 998708
- **4×** Tic-tac-toe crossbar ref. 998709
- **9×** Tic-tac-toe cube ref. 998710
- **8×** M8 flat washer one on each bolt
- **8×** Hex bolt M6×45 ref. 2090194

BOLT AND TOOL




Tool: **10 mm socket wrench with extension** (or 10 mm L wrench): the bolt sits in a recess.

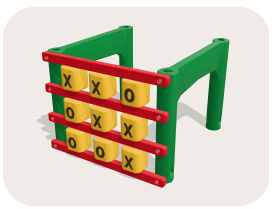

How it looks at the end of step 7

STEP 8 OF 21

8 First roofed tower: deck and 3 tubes

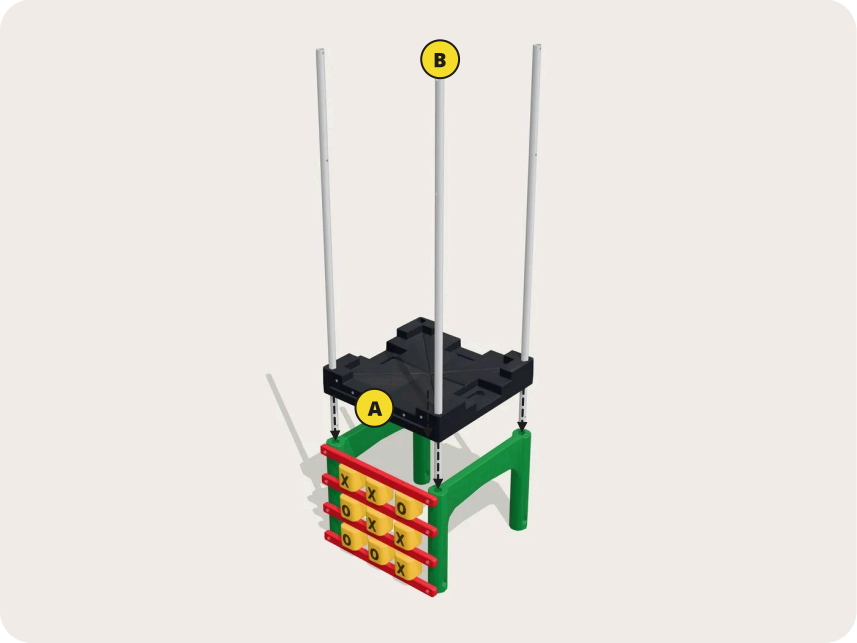

A Deck side without the recess: tic-tac-toe side (window wall)

B Tube holes facing up

Put the deck on the leg frames. Check the deck position: the **side without the recess goes on the tic-tac-toe side** (where the window wall goes).

Insert **3 tubes of 2000 mm** through the deck corners down to the bottom of the leg frames, with the single hole down.


> The roofed towers are built like the swing tower (steps 1 to 6), with 2000 mm tubes, without the caps and with the roof at the end.

PARTS FOR THIS STEP



1× Deck
ref. 998711


3× 2000 tube
ref. 998712

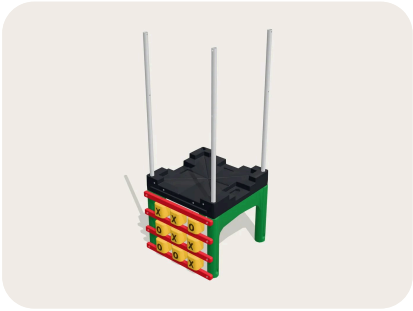

How it looks at the end of step 8

STEP 9 OF 21

9 First roofed tower walls

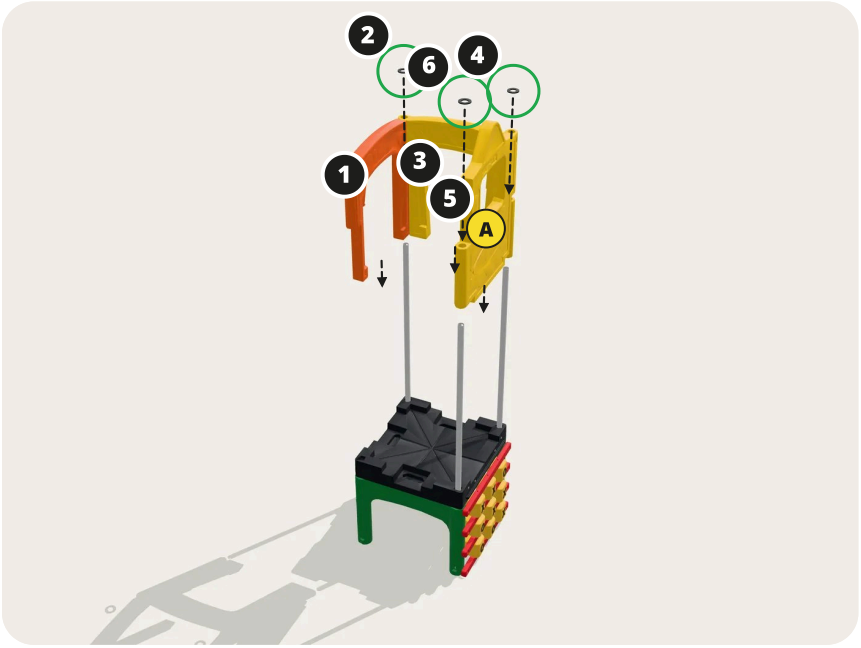

A Window wall: tic-tac-toe side

Fit the walls and the EVA spacers in the same order as step 3:

1. Orange wall with circles (side of the bridge to the swing tower) and **2.** EVA. **3. Yellow striped wall** (side of the bridge to the second roofed tower) and **4.** EVA.

5. Window wall (tic-tac-toe side) and **6.** EVA.

WARNING
Always keep the **rivet nuts facing outwards** and an EVA spacer between two walls.

PARTS FOR THIS STEP



1× Orange wall with circles
ref. 998706



1× Yellow striped wall
ref. 998707



3× EVA spacer
ref. 998728




1× Window wall
ref. 1000903



How it looks at the end of step 9

STEP 10 OF 21

10 Last wall, last EVA spacer and 4th tube

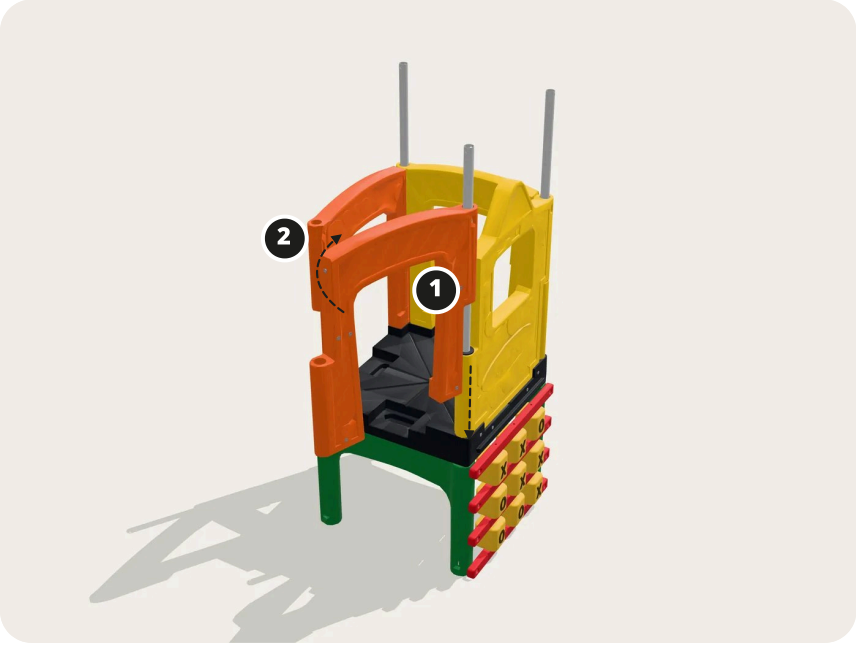


1. Fit the **orange striped wall** (slide side) on the corner tube already in place and lower it straight down, swung open outwards. **2.** Resting on the deck, **swing it around the tube** until the square is closed.


3. Then fit the **last EVA spacer from the front**, horizontally, and **4.** lower the **4th tube** (single hole down), which locks the walls.

PARTS FOR THIS STEP

- **1×** Orange striped wall ref. 998726
- **1×** EVA spacer ref. 998728
- **1×** 2000 tube ref. 998712

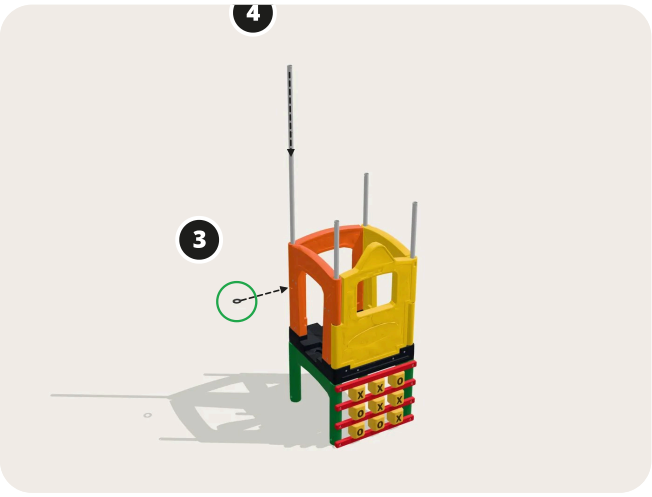

Last EVA spacer (3) and 4th tube (4)

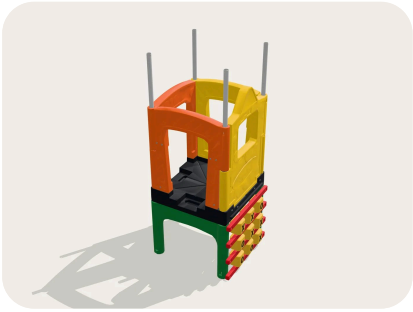

How it looks at the end of step 10


STEP 11 OF 21

11 Join the walls and fit the roof




A 4 M6×90 bolts + washer, 1 at each corner

B The roof fits over the 4 tubes

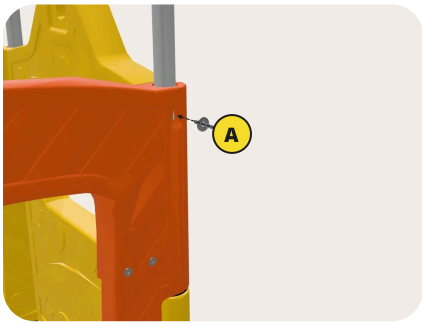

M6×90 bolt going through the tube

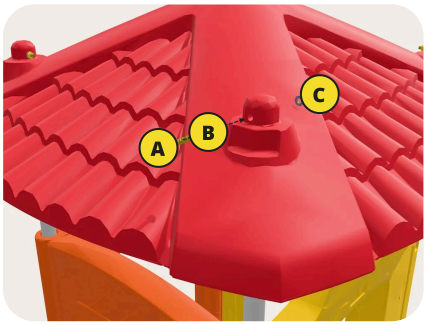

Roof fastening on each tube


Join the walls with **4 M6×90 bolts with washer**, 1 at each corner, from the outside in.

Place the roof on the 4 tubes. At each corner, fix it with an **M8×70 bolt**, an **M8 flat washer on each side** and an **M8 lock nut** (4 sets, 8 washers): the bolt goes in with a washer on one side and, on the other side, go the other washer and the nut.

PARTS FOR THIS STEP

- **1×** Roof ref. 998705
- **8×** M8 flat washer two on each M8×70 bolt
- **4×** M8 lock nut (yellow) ref. 2090323
- **4×** Hex bolt M8×70 (fully threaded) ref. 2090329
- **4×** Washer one on each bolt
- **4×** Hex bolt M6×90 ref. 2090460

BOLTS AND TOOLS



Tool: **10 mm wrench.**



Tool: **2 × 13 mm wrenches: one holds the nut and the other turns the bolt.**



How it looks at the end of step 11

STEP 12 OF 21


12 Second roofed tower




A Second roofed tower: build it like the first one (steps 7 to 11)

B Window wall: tic-tac-toe side


BOLTS AND TOOLS

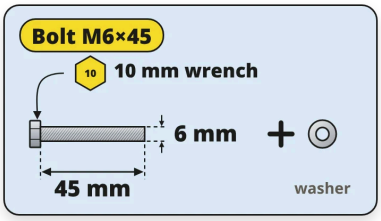

Tool: **10 mm socket wrench with extension** (or 10 mm L wrench): the bolt sits in a recess.

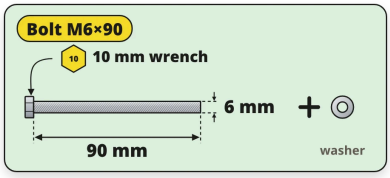

Tool: **10 mm wrench**.

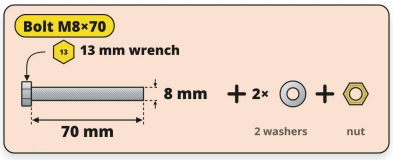

Tool: **2 × 13 mm wrenches**: one holds the nut and the other turns the bolt.

Build the **second roofed tower** the same way, repeating steps 7 to 11: leg frames and tic-tac-toe, deck and 3 tubes of 2000 mm, the 4 walls with the EVA spacers, the 4th tube, the 4 M6×90 bolts and the roof.

It is the same as the first one, **turned around**: the tic-tac-toe and the window wall are on the side opposite to the first tower, and the **deck side without the recess** goes on their side.

On this tower: **yellow striped** on the side of the bridge to the first roofed tower, **orange wall with circles** on the side of the bridge to the tunnel tower and **orange striped** on the slide side.

PARTS FOR THIS STEP

1× Roof ref. 998705	**1×** Orange wall with circles ref. 998706	**1×** Yellow striped wall ref. 998707
2× Leg frame ref. 998708	**4×** Tic-tac-toe crossbar ref. 998709	**9×** Tic-tac-toe cube ref. 998710
1× Deck ref. 998711	**4×** 2000 tube ref. 998712	**1×** Orange striped wall ref. 998726
4× EVA spacer ref. 998728	**1×** Window wall ref. 1000903	**16×** M8 flat washer 8 on the tic-tac-toe and 8 on the roof
8× Hex bolt M6×45 ref. 2090194	**4×** M8 lock nut (yellow) ref. 2090323	**4×** Hex bolt M8×70 (fully threaded ref. 209032



4× Washer
one on each bolt

4× Hex bolt M6×90
ref. 2090460

STEP 13 OF 21


13 Tunnel tower



A Tunnel tower: build it like the swing tower (steps 1 to 6)

B Here goes the yellow wall with circles (tunnel side)

BOLT AND TOOL

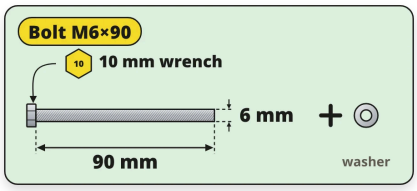

Tool: **10 mm wrench**.

Build the **tunnel tower**, the second tower without a roof, repeating steps 1 to 6: leg frames, deck, 4 tubes of 1550 mm with the caps, the 4 walls with the EVA spacers and the 4 M6×90 bolts.

Here the fourth wall is the **yellow wall with circles**, on the tunnel side, and the **deck side without the recess** goes on its side.

On this tower: **orange wall with circles** on the bridge side, facing the orange wall with circles of the second roofed tower; **yellow striped** on the ramp side; **orange striped** on the slide side.

> Place the 4 towers as in the picture, leaving about 80 cm between the decks: the swing tower next to the first roofed tower, the second roofed tower behind the first one and the tunnel tower next to the second one. The bridges set the exact distance in the next step.

PARTS FOR THIS STEP

- **1×** Orange wall with circles ref. 998706
- **1×** Yellow striped wall ref. 998707
- **2×** Leg frame ref. 998708
- **1×** Deck ref. 998711
- **1×** Orange striped wall ref. 998726
- **4×** EVA spacer ref. 998728
- **1×** Yellow wall with circles ref. 998730
- **4×** 1550 tube (tower without roof) ref. 1003202
- **4×** Tube cap ref. 1100137
- **4×** Washer one on each bolt
- **4×** Hex bolt M6×90 ref. 2090460


STEP 14 OF 21

14 Bridges




A Bridge between the two roofed towers: fixed the same way

B Bridge between the second roofed tower and the tunnel tower: fixed the same way

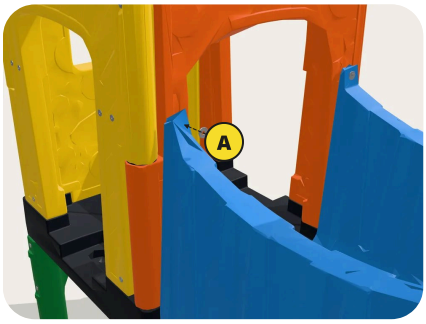

At the top: bridge tab on the wall

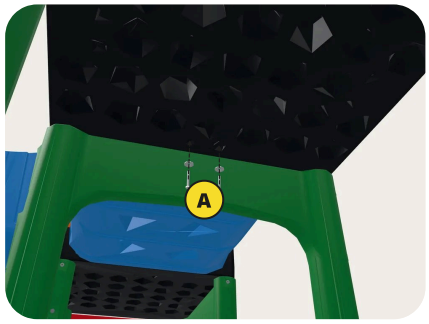

At the bottom: from under the deck

Fit the 3 bridges: between the swing tower and the first roofed tower (orange walls with circles), between the two roofed towers (yellow striped walls) and between the second roofed tower and the tunnel tower (orange walls with circles). Each bridge takes **8 M6×45 bolts with washer**.

At the top: each bridge has **4 tabs**, 2 at each end. Each tab takes **1 bolt with washer**, which goes through the tab and screws into the **wall rivet nut**.


At the bottom: 2 bolts from under each deck, from below.

WARNING
Items fixed to the deck (bridges, slides and ramps) must be bolted **from below**, in addition to the wall fastenings.

PARTS FOR THIS STEP

- **3×** Bridge ref. 1000902
- **24×** Hex bolt M6×45 ref. 2090194
- **24×** Washer one on each bolt

BOLT AND TOOL



Tool: **10 mm wrench.**



How it looks at the end of step 14


STEP 15 OF 21

15 Slides




A Slide of the second roofed tower: fixed the same way

B Slide of the tunnel tower: fixed the same way

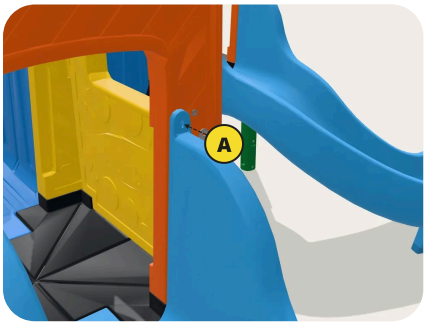

At the top: slide tab on the wall

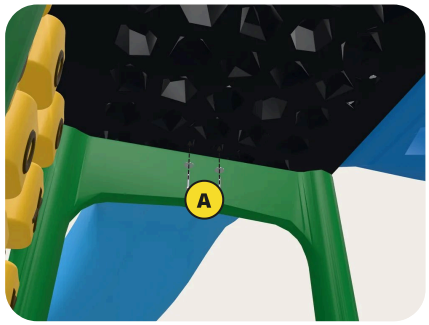

At the bottom: from under the deck

Fit the 3 slides on the orange striped walls: one on each roofed tower and one on the tunnel tower. Bolt them with **12 M6×45 bolts with washer**.

Each slide has **2 fixing points on the wall** (1 bolt in each tab, into the wall rivet nut) and **2 on the deck**, from below.

PARTS FOR THIS STEP



3× Slide
ref. 998703




12× Hex bolt M6×45
ref. 2090194



12× Washer
one on each bolt

BOLT AND TOOL



Tool: **10 mm wrench**.




How it looks at the end of step 15

STEP 16 OF 21


16 Climbing ramps



A Other swing tower ramp: fixed the same way (so is the tunnel tower ramp)

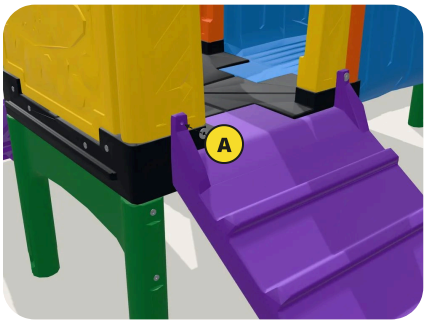

At the top: ramp tab on the wall

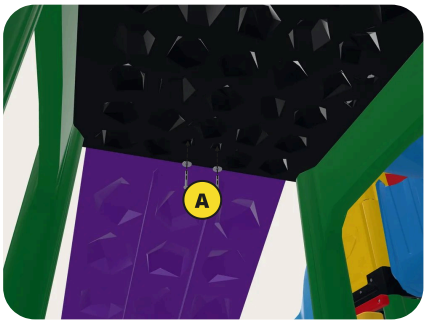

At the bottom: from under the deck


Fit the 3 ramps: 2 on the swing tower (yellow striped and orange striped walls) and 1 on the tunnel tower (yellow striped wall). Bolt them with **12 M6×45 bolts with washer**.

Each ramp has **2 fixing points on the wall** and **2 on the deck**, from below.

PARTS FOR THIS STEP

- **3×** Climbing ramp ref. 998704
- **12×** Hex bolt M6×45 ref. 2090194
- **12×** Washer one on each bolt

BOLT AND TOOL




Tool: **10 mm wrench**.



How it looks at the end of step 16

STEP 17 OF 21


17 Tunnel slide bases

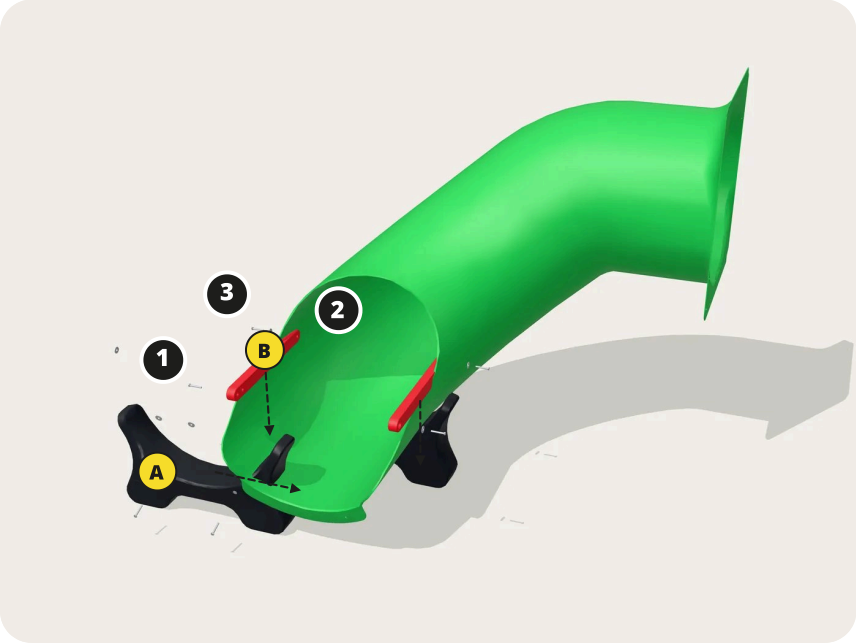

A Base at the front of the tunnel: 2 M6×45 bolts + washer

B Small crossbars join the two bases: 4 bolts

BOLT AND TOOL

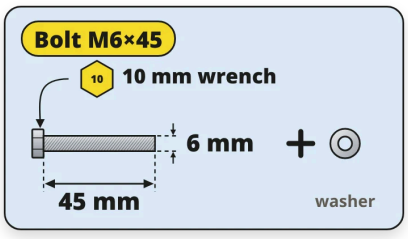

Tool: **10 mm wrench**.

With the tunnel on the ground, next to the playground, fit one of the bases at the **front** of the tunnel slide and bolt it (**2 M6×45 bolts with washer**).

Place the second base and bolt the **2 small crossbars** to join the two bases (**4 M6×45 bolts with washer**).

PARTS FOR THIS STEP

- **1×** Tunnel slide ref. 998702
- **2×** Tunnel slide base ref. 998714
- **2×** Small crossbar ref. 953203
- **6×** Hex bolt M6×45 ref. 2090194
- **6×** Washer one on each bolt




How it looks at the end of step 17

STEP 18 OF 21

18 Tunnel slide on the tunnel tower



A 12 M6×45 bolts + washer around the tunnel mouth

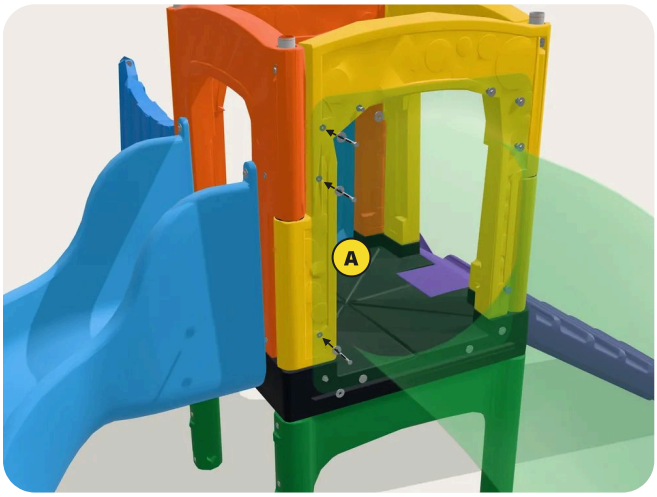

Tunnel mouth bolts

A M6×45 bolt + washer, 3 at each end of the tunnel mouth


Fit the tunnel slide on the **yellow wall with circles** of the tunnel tower and bolt it with **12 M6×45 bolts with washer**: 3 at each of the 4 ends of the tunnel mouth, from the outside in, into the wall rivet nuts.

PARTS FOR THIS STEP


12× Hex bolt M6×45 ref. 2090194

12× Washer one on each bolt

BOLT AND TOOL



Tool: **10 mm wrench.**

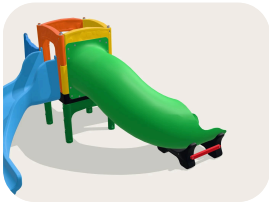


How it looks at the end of step 18

STEP 19 OF 21

19 Red support and basketball hoop



A Basketball hoop on the outside of the support

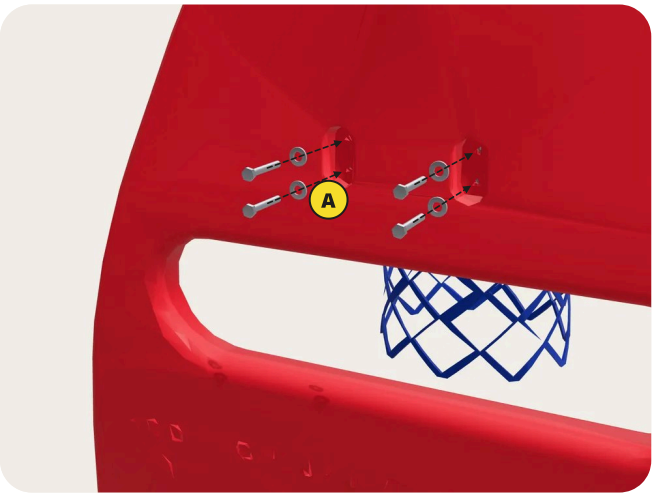

Hoop bolts, from the inside of the support

A 4 M6×45 bolts + washer, from the inside of the support, into the hoop rivet nuts


Fit the **basketball hoop** on the outside of the red swing-set support.

Fix it with **4 M6×45 bolts with M8 flat washer**, fitted from the inside of the support into the hoop rivet nuts.

PARTS FOR THIS STEP

- **1×** Red swing-set support ref. 975408
- **1×** Basketball hoop ref. 988702
- **4×** M8 flat washer one on each bolt
- **4×** Hex bolt M6×45 ref. 2090194

BOLT AND TOOL




Tool: **10 mm wrench.**




How it looks at the end of step 19


STEP 20 OF 21

20 Swing beam

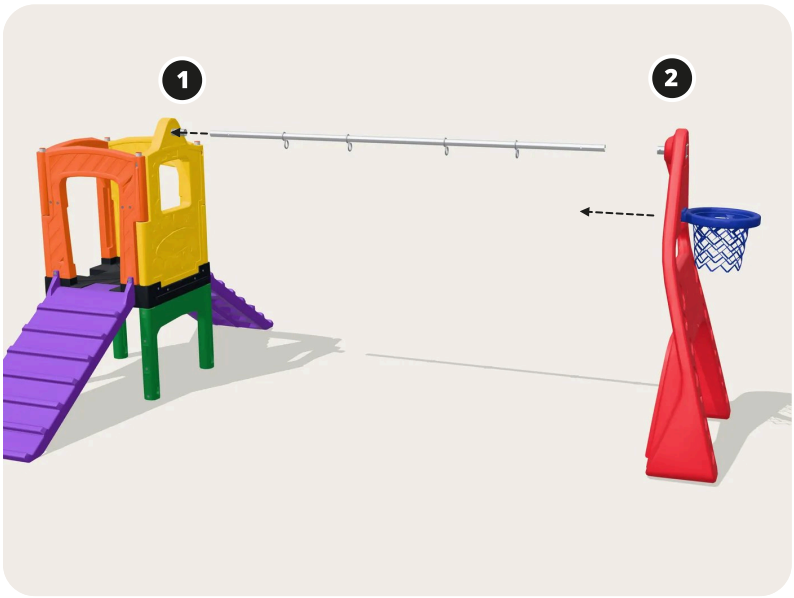

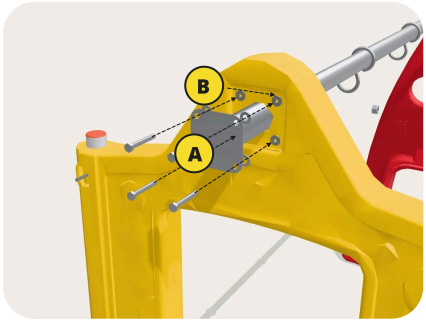

Lock on the inside of the swing tower

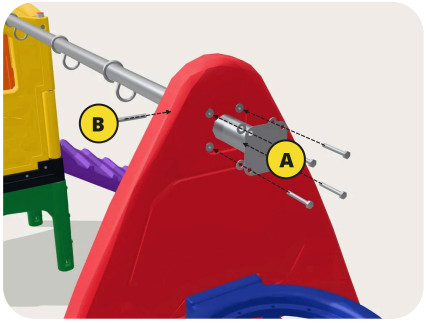

Lock on the outside of the red support

Metal locks: fit one lock on the inside of the swing tower, with the sleeve coming out through the hole of the swing window wall, and the other on the outside of the red support, at the top. Each lock takes **4 M6×45 bolts with M8 flat washer**, into the rivet nuts.

1. Fit one end of the 2450 mm beam in the tower lock. **2.** Bring the red support closer, fitting the other end of the beam in its lock.


At each end, secure the beam in the lock with **1 5/16" × 2 1/4" bolt** and a **lock nut**, going through the lock and the beam.

> The red support is lined up with the tower, with the beam level and the 4 hooks facing down. It is filled with water before use (step 21).


PARTS FOR THIS STEP

 **2×** Swing beam metal lock ref. 954312	 **1×** 1.5" swing beam (2450) ref. 1004301
 **8×** M8 flat washer one on each bolt	 **8×** Hex bolt M6×45 ref. 2090194
 **2×** 5/16" lock nut ref. 2090370	 **2×** Hex bolt 5/16" × 2 1/4" ref. 2090392

BOLTS AND TOOLS



Tool: **10 mm wrench.**




Tool: **2 × 13 mm wrenches:** one holds the nut and the other turns the bolt.




How it looks at the end of step 20

STEP 21 OF 21

21 Swing seats

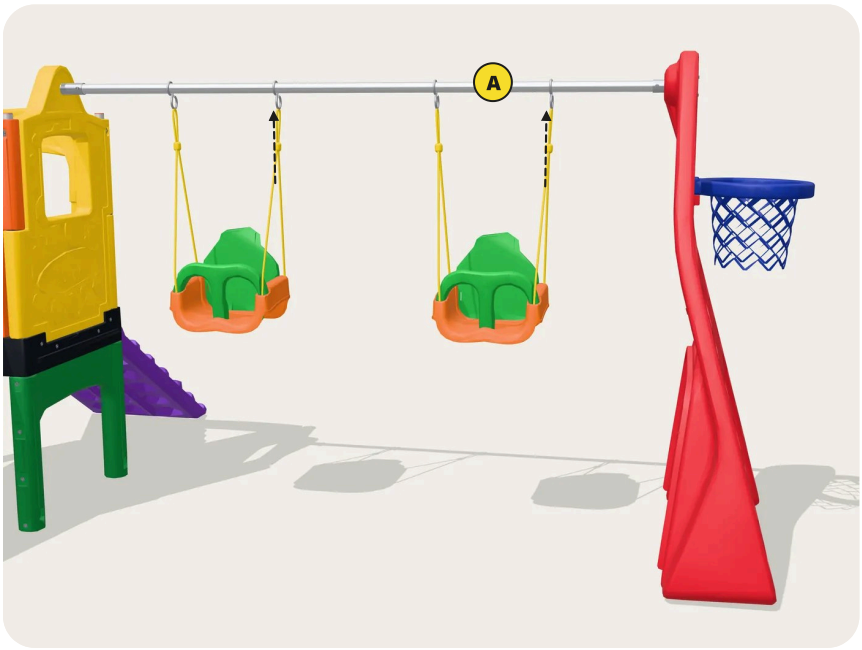

A Rope hooks on the beam hooks

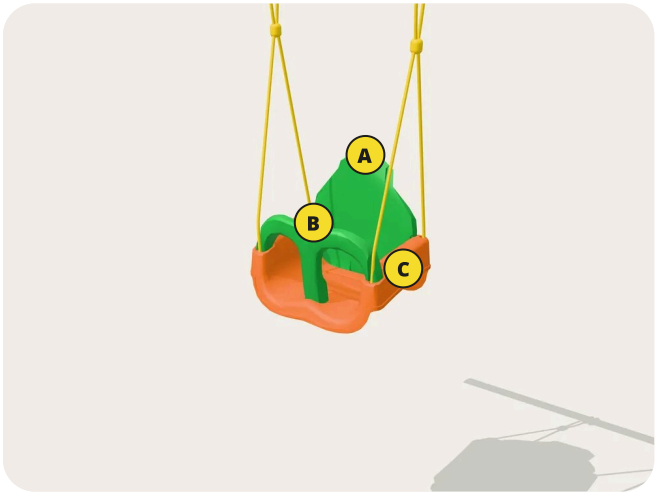

A Backrest: position A (up to 24 months) or B (up to 36 months)

B Front guard with the safety belt

C Rope through the base holes, with a figure-8 knot under the seat

The swing seats come assembled; check them during installation. **Backrest:** fit it on the seat until it clicks, in **position A** for children up to 24 months or in **position B** up to 36 months.

Safety belt: pass the part of the belt without the buckle through the slots of the backrest, around the part, with the loose ends to the front. Place the "T" slider on the inside of the swing frame and fasten the buckle with the **grooved side up**.

Ropes: they go through the base holes, seated in the groove of the guard, with a **figure-8 knot** at each front part, under the seat, and locked in the fins at the lower back of the seat.

Hang the 2 swing seats on the beam with the **hooks** at the ends of the ropes, on the **4 beam hooks**.

WARNING
Before use, fill the red support with water through the filling valve, up to the level of the valve itself. Adding 50 g of chlorine through the valve every 120 days is suggested, to prevent microorganisms and insects. Maximum load of **23 kg on each swing seat**; the swing seats must not be replaced with other models.

Whoever installed it is responsible for checking the knots under the swing seat and putting their own weight on the seat, to make sure it is safe to use. **Always use the safety belt** adjusted to the child. The swing seat grows with the child: to adapt it, remove the backrest and the guard through the locks under the seat.

PARTS FOR THIS STEP



2× Swing seat
ref. 9355.B


FASTENING DETAILS

How each part is bolted



Bridge

M6×45 bolt + washer through the bridge tab, into the wall rivet nut. 4 tabs per bridge, 1 bolt in each.

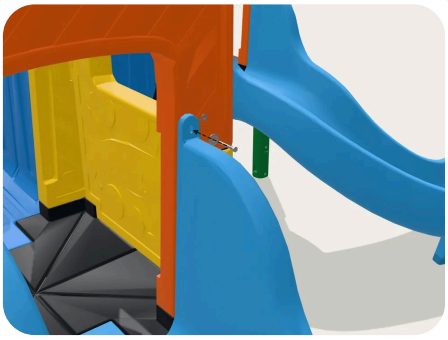


Slide

M6×45 bolt + washer through the slide tab, into the wall rivet nut. 2 per slide.



Climbing ramp

M6×45 bolt + washer through the ramp tab, into the wall rivet nut. 2 per ramp.

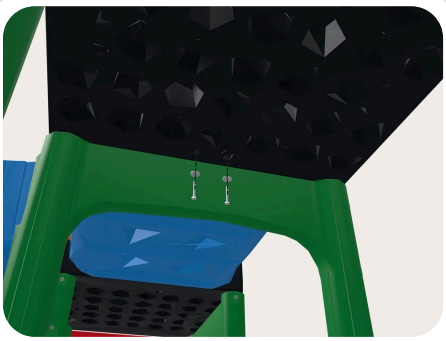


Bottom fastening

Bridges, slides and ramps: 2 M6×45 bolts + washer under the deck, always from below.




Wall

M6×90 bolt + washer, from the outside in, through both walls and the tube. 1 at each corner.

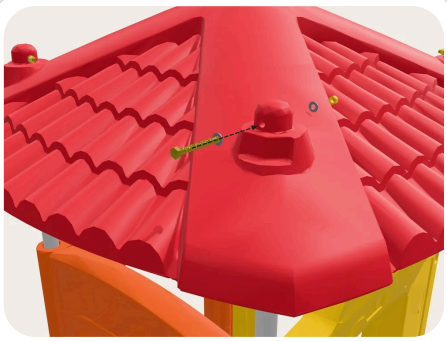


Roof

M8×70 bolt with an M8 flat washer on each side and an M8 lock nut. 1 set on each tube.

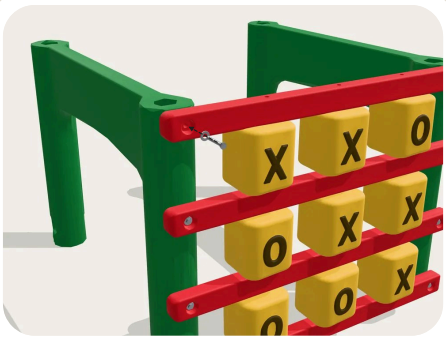


Tic-tac-toe

M6×45 bolt + M8 flat washer, recessed at the end of each crossbar, into the leg-frame rivet nut. 8 per tic-tac-toe.

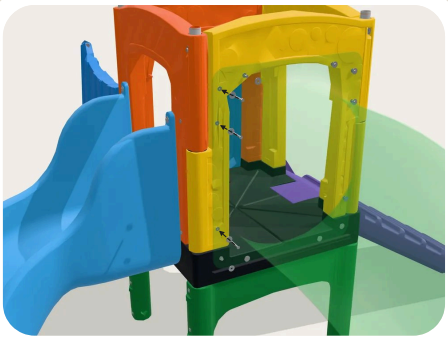


Tunnel slide

M6×45 bolt + washer, 3 at each end of the tunnel mouth, into the rivet nuts of the yellow wall with circles.

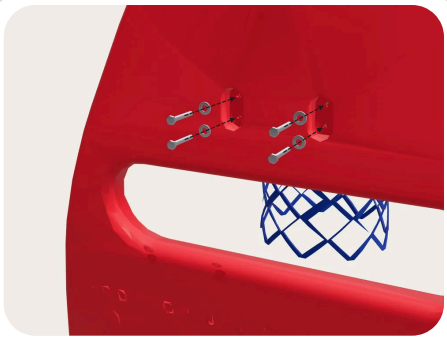

Basketball hoop

4 M6×45 bolts + M8 flat washer, from the inside of the red support, into the hoop rivet nuts.

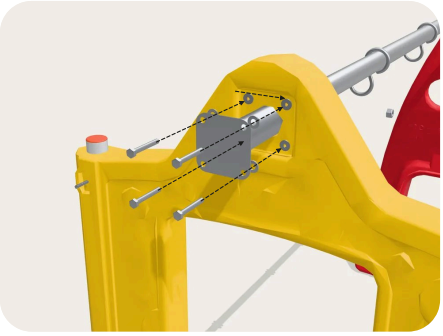

Swing beam

Lock fixed with 4 M6×45 bolts + M8 flat washer; the beam is locked with a 5/16" × 2 1/4" bolt and lock nut.



Assembly complete

Visually check the product, making sure all parts are fitted and well fastened. **Only then release it for use.**

Before releasing it for use, fill the red swing-set support with water. Maximum load of 23 kg on each swing seat; always use the safety belt.

INSTALLATION DETAILS

Location and safety area

To ensure user safety, minimum spaces and free distances must be respected.

Circulation area: minimum width of 1.20 m around the equipment, so that users can run freely; minimum area of 1.50 m where the path changes direction, allowing access and turning of strollers or wheelchairs.

Fall space: adjacent static equipment with overlapping fall spaces must be at least 1.50 m apart for a fall height of up to 600 mm, and 2.50 m for greater heights. Maximum fall height of this product: **700 mm**.

Slide impact area: at least 1000 mm from the sides of the exit section and 2000 mm (exit type 01) or 1000 mm (exit type 02) from the end of the exit section.

Ground: even, continuous, stable and non-slip surface in any weather, free of obstacles and with a cross slope of 2% at most. Use on grass, sand, carpet or another soft, level surface is recommended.

Location: first check for chemical agents and loose material (debris, sharp objects). Prefer a well-ventilated place, with morning sun and sheltered from drafts; do not install in basements or garages. Never use near stairs, public roads, swimming pools or wet or slippery places. If the area is fenced, the gates must open outwards, with a minimum opening of 1 m.

Swing set: swing equipment side by side must have at least **1.50 m** between the projection of one frame and the seat of the other; static equipment next to swings, at least **2.50 m** from the frame projection to the swing seat. The impact-absorbing surface must be at least **1.75 m** wide.

Area reserved for installation and slide impact: about **8.3 × 5.2 m**.

Red swing-set support: before use, fill it with water through the filling valve up to the level of the valve itself; 50 g of chlorine through the valve every 120 days is suggested. Maximum load of 23 kg on each swing seat.

Anchor kits and signs: the product comes with 4 ground anchor kits (ref. 998732), to fix the playground on a concrete base, and 3 safety signs (ref. 998715), to fix in a visible place.

To prevent accidents, the child should ideally wear shoes. This product is not intended for commercial use.

INSPECTION AND MAINTENANCE

Keep the playground safe

Visual inspection — daily

- Cleanliness
- Free distances between the ground and the equipment
- Ground surface finish and exposed foundations
- Sharp edges and missing components
- Excessive wear and structural integrity

Operational inspection — every 1 to 3 months

Special attention to the structural integrity of the product, besides the visual inspection items.

Main inspection — yearly

- Structure: bending, deformation and cracks
- Finish: cracks, chips, broken or open joints
- Missing, bent, broken, loose or worn parts
- Edges, pinch points, accesses and protective surfaces
- Swing seats: seats, rope knots, hooks and the water in the red support

Maintenance

- Tighten the joining parts and clean (do not use paints, solvents or other chemicals)
- Keep the free spaces and the drainage holes clean
- Replace fasteners and defective or worn parts

According to NBR 16071-7:2012. Modifications that affect safety only after consulting the manufacturer.

XALINGO S/A INDÚSTRIA E COMÉRCIO
BR 471, km 147 – Santa Cruz do Sul – RS – Brasil – CEP 96835-642
CNPJ 95.425.534/0001-76

SAC
(51) 3719-9800 · sac@xalingo.com.br
www.xalingo.com.br

Grand Play · ref. 1005.4
Keep this manual for future reference.